

EMERGENCY PACK

SKU:S33469

INFORMATION


Plug and Play Emergency Pack. Designed to seamlessly integrate with a wide range of LED Fitting. Connected to the low voltage connection between the fitting and the LED driver, the Emergency pack will charge and maintain a charge with no change to the regular functions of the LED Fitting. The Emergency pack automatically adjusts the output LED current to provide best match between the battery and the load, providing maximum illumination whilst ensuring full battery duration.

Warranty: 5 Years



SPECIFICATIONS

	Wattage	2W
	Voltage	220-240V (AC)
	Frequency	50/60Hz
	Emergency Lumen Output	120lm
	Lifetime	50,000hrs
	Test Button	No
	Operating Temperature	0 ~ 40°C
	Battery Type	LiFePO4 3.2V 2AH
	Charging Time	24 hours
	Emergency Duration	3 hours
	Weight	100g

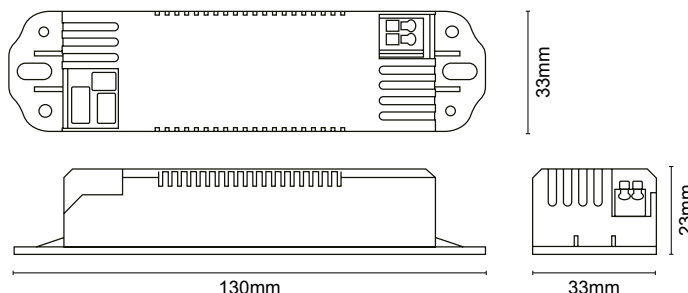

COMPATIBLE MODELS

Polo Bulkhead: S33467

UK CA CE  RoHS Compliant

LumiLife is constantly developing and improving its products. For this reason, all product descriptions are intended as a general guide and we may change specifications time to time in the interest of product development, without prior notification or public announcement. Data in this sheet has been obtained in controlled experimental conditions. However, LumiLife cannot accept any liability arising from the reliance on such data to the extent permitted by law.
NOTE: PowerMaster is transitioning to LumiLife, during this time current stock may be delivered as PowerMaster.

