
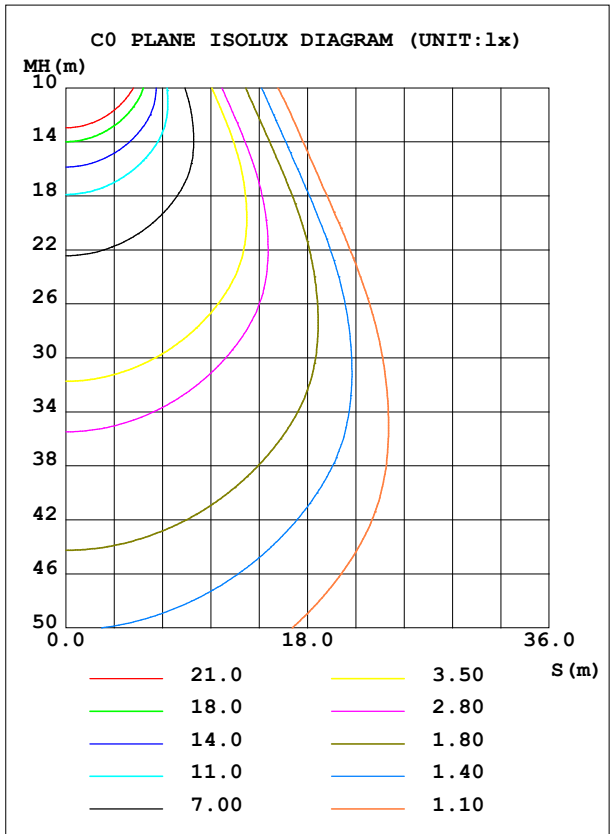


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:240.34V I:0.2639A P:61.294W PF:0.9664 Freq:50.00Hz Lamp Flux:6639.55x1 lm		
NAME: 595X1195 3CCT背发光灯盘	TYPE: LED	WEIGHT:
SPEC.: 240V60W4000K	DIM.:	SERIAL No.: 01
MFR.:	SUR.: 555X1155MM	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL		Imax (cd)	3525	S/MH (C0/180)	1.18
NOMINAL POWER (W)	60	LOR (%)	100.0	S/MH (C90/270)	1.04
RATED VOLTAGE (V)	240	TOTAL FLUX (lm)	6639.6	$\eta$ UP, DN (C0-180)	0.0,54.1
NOMINAL FLUX (lm)	6639.55	CIE CLASS	DIRECT	$\eta$ UP, DN (C180-360)	0.0,45.9
LAMPS INSIDE	1	$\eta$ up (%)	0.0	CIBSE SHR NOM	1.00
TEST VOLTAGE (V)	240	$\eta$ down (%)	100.0	CIBSE SHR MAX	1.15

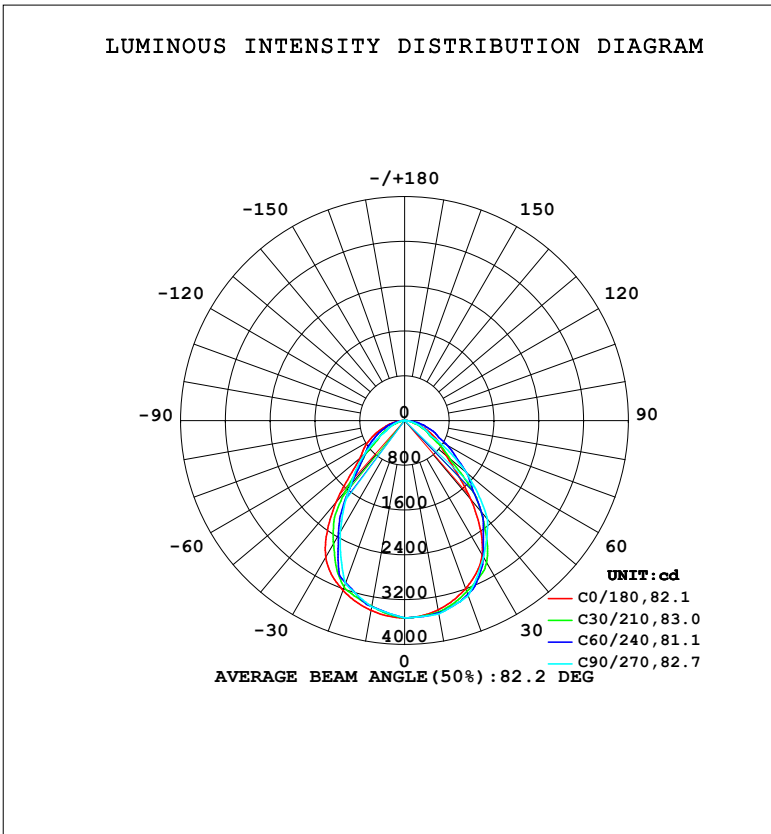

H( $\beta$ ) Range:-90 - 90DEG  
 H( $\beta$ ) Interval: 2.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:梁玉莲  
 Test Date:2024-01-22

V(B) Range:-80 - 80DEG  
 V(B) Interval: 5.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.00.453  
 Humidity:65.0%  
 Test Distance:12.400m [K=1.0000]  
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	%lum,lamp
10	3434	3478	3508	3458	3444	3372	3379	3389	0- 10	331.0	331.0	4.99,4.99
20	3193	3299	3330	3248	3225	3074	3099	3132	10- 20	938.8	1270	19.1,19.1
30	2774	2885	2818	2858	2822	2512	2297	2572	20- 30	1366	2635	39.7,39.7
40	1847	2048	2306	2065	1907	1652	1495	1642	30- 40	1426	4061	61.2,61.2
50	971.4	1122	1422	1177	1042	863.6	939.9	812.7	40- 50	1104	5165	77.8,77.8
60	651.0	641.8	538.0	672.3	750.2	527.4	384.5	496.9	50- 60	722.3	5887	88.7,88.7
70	335.7	385.5	318.0	406.4	428.4	318.4	225.3	317.2	60- 70	445.7	6333	95.4,95.4
80	140.3	219.3	98.02	209.0	178.5	136.8	66.12	160.1	70- 80	248.2	6581	99.1,99.1
90	0	0	0	0	5.287	0	0	0	80- 90	58.43	6640	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 4666.8 lm

%lum = 70.3%

%lamp = 70.3%

Conical surface Flux(120deg): 5887.3 lm

%lum = 88.7%

%lamp = 88.7%

0 - 130 DEG Zonal Flux:6639.6 %lum: 100.0%

130 - 180 DEG Zonal Flux:0 %lum: 0.0%

All measured values may vary less than 35 %

from the average measured value in the 0 to 130 deg. zone: 15.2%

All measured values in the 0 to 130 deg. zone

may vary less than 60% from the average value of itself: 30.3%

H( $\beta$ ) Range:-90 - 90DEG

H( $\beta$ ) Interval: 2.0DEG

Test Speed: HIGH

Temperature:25.3DEG

Operators:梁玉莲

Test Date:2024-01-22

V(B) Range:-80 - 80DEG

V(B) Interval: 5.0DEG

Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.00.453


Humidity:65.0%

Test Distance:12.400m [K=1.0000]

Remarks:

LUMINANCE LIMITATION CURVES

Test:U:240.34V I:0.2639A P:61.294W PF:0.9664 Freq:50.00Hz Lamp Flux:6639.55x1 lm		
NAME: 595X1195 3CCT背发光灯盘	TYPE: LED	WEIGHT:
SPEC.: 240V60W4000K	DIM.:	SERIAL No.: 01
MFR.:	SUR.: 555X1155MM	Shielding Angle:

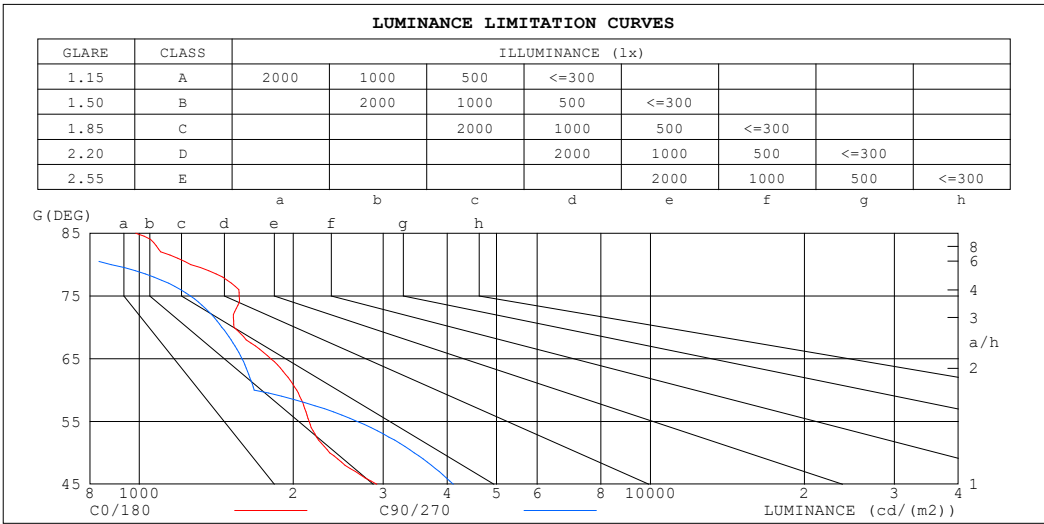

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	984	0
80	1260	881
75	1568	1259
70	1531	1451
65	1808	1589
60	2031	1679
55	2149	2671
50	2358	3452
45	2916	4111


H(β) Range:-90 - 90DEG  
 H(β) Interval: 2.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:梁玉莲  
 Test Date:2024-01-22

V(B) Range:-80 - 80DEG  
 V(B) Interval: 5.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.00.453  
 Humidity:65.0%  
 Test Distance:12.400m [K=1.0000]  
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.34V I:0.2639A P:61.294W PF:0.9664 Freq:50.00Hz Lamp Flux:6639.55x1 lm		
NAME: 595X1195 3CCT背发光灯盘	TYPE: LED	WEIGHT:
SPEC.: 240V60W4000K	DIM.:	SERIAL No.: 01
MFR.:	SUR.: 555X1155MM	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.07	1.03	.00	1.04	1.01	.98	1.00	.98	.95	.96	.94	.92	.93	.91	.90	.88
2.0	.95	.90	.85	.94	.88	.84	.90	.86	.82	.87	.83	.80	.84	.81	.78	.76
3.0	.86	.79	.73	.84	.78	.72	.81	.76	.71	.79	.74	.70	.76	.72	.69	.67
4.0	.77	.70	.64	.76	.69	.63	.74	.67	.63	.71	.66	.62	.69	.65	.61	.59
5.0	.70	.62	.56	.69	.62	.56	.67	.61	.56	.65	.60	.55	.63	.58	.54	.53
6.0	.64	.56	.50	.63	.56	.50	.61	.55	.50	.60	.54	.49	.58	.53	.49	.47
7.0	.59	.51	.45	.58	.51	.45	.57	.50	.45	.55	.49	.45	.54	.48	.44	.43
8.0	.54	.46	.41	.54	.46	.41	.52	.46	.41	.51	.45	.41	.50	.44	.40	.39
9.0	.50	.43	.38	.50	.42	.37	.48	.42	.37	.47	.41	.37	.46	.41	.37	.35
10.0	.47	.39	.34	.46	.39	.34	.45	.39	.34	.44	.38	.34	.43	.38	.34	.32

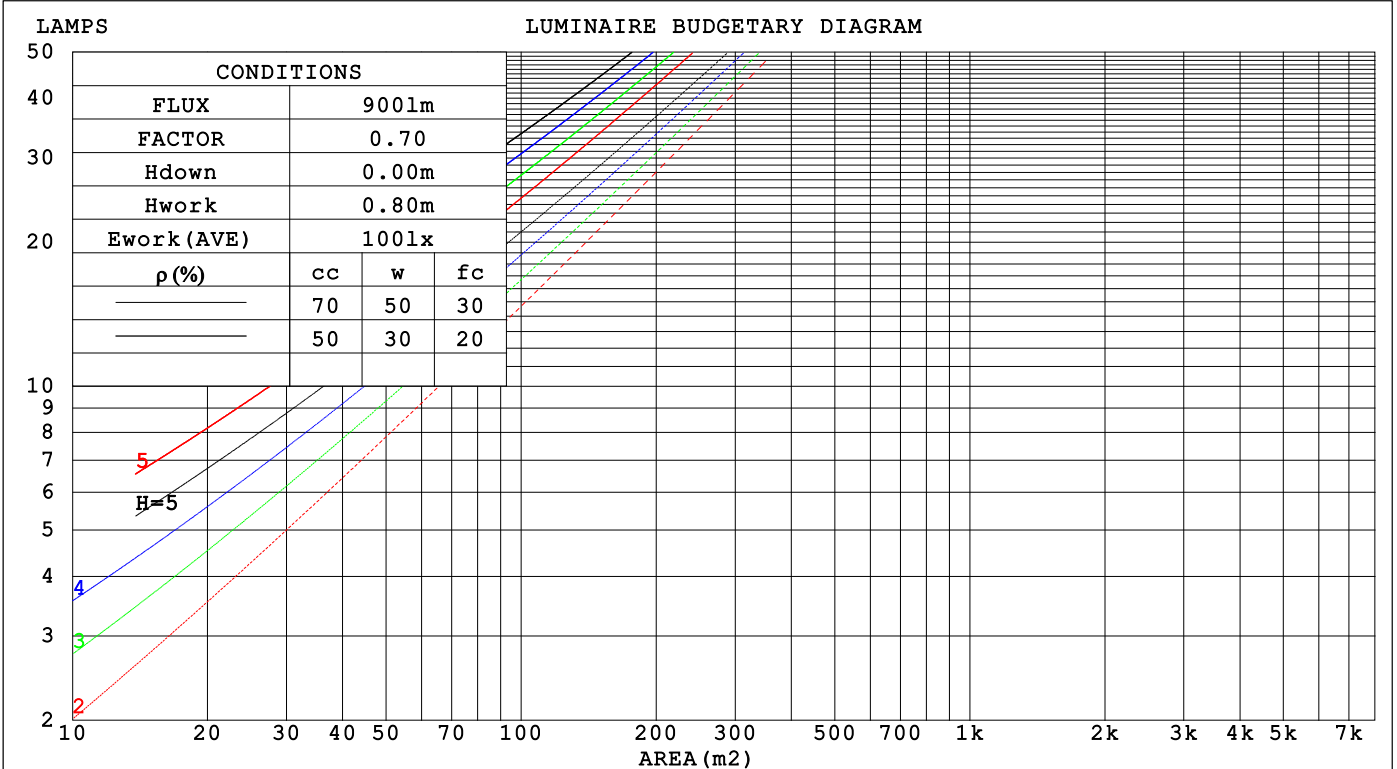

H(β) Range:-90 - 90DEG  
H(β) Interval: 2.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:梁玉莲  
Test Date:2024-01-22

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:12.400m [K=1.0000]  
Remarks:

WEC AND CCEC

Test:U:240.34V I:0.2639A P:61.294W PF:0.9664 Freq:50.00Hz Lamp Flux:6639.55x1 lm		
NAME: 595X1195 3CCT背发光灯盘	TYPE: LED	WEIGHT:
SPEC.: 240V60W4000K	DIM.:	SERIAL No.: 01
MFR.:	SUR.: 555X1155MM	Shielding Angle:

$\rho_{CC}$	80%			70%			50%			30%			10%			0
$\rho_w$	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
$\rho_{fc}$	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.256	.146	.046	.249	.142	.045	.236	.135	.043	.224	.129	.041	.213	.124	.040	
2.0	.245	.134	.041	.239	.131	.041	.227	.126	.039	.217	.122	.038	.207	.117	.037	
3.0	.230	.122	.037	.225	.120	.036	.215	.116	.035	.206	.113	.035	.197	.109	.034	
4.0	.215	.112	.033	.211	.110	.033	.202	.107	.032	.194	.104	.031	.186	.101	.031	
5.0	.202	.103	.030	.198	.101	.030	.190	.099	.029	.183	.096	.029	.176	.094	.028	
6.0	.189	.095	.027	.186	.094	.027	.179	.092	.027	.172	.090	.026	.166	.088	.026	
7.0	.178	.088	.025	.175	.087	.025	.169	.085	.025	.163	.083	.024	.157	.082	.024	
8.0	.168	.082	.023	.165	.081	.023	.159	.080	.023	.154	.078	.023	.149	.077	.022	
9.0	.158	.077	.021	.156	.076	.021	.151	.075	.021	.146	.073	.021	.142	.072	.021	
10.0	.150	.072	.020	.148	.071	.020	.143	.070	.020	.139	.069	.020	.135	.068	.019	

$\rho_{CC}$	80%			70%			50%			30%			10%			0
$\rho_w$	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
$\rho_{fc}$	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.177	.157	.139	.151	.134	.119	.103	.092	.083	.059	.054	.048	.019	.017	.016	
2.0	.166	.132	.104	.142	.114	.090	.097	.079	.063	.056	.046	.037	.018	.015	.012	
3.0	.157	.114	.080	.134	.098	.069	.092	.068	.049	.053	.040	.029	.017	.013	.009	
4.0	.148	.100	.063	.127	.087	.055	.088	.060	.039	.051	.035	.023	.016	.012	.008	
5.0	.141	.089	.051	.121	.077	.045	.083	.054	.032	.048	.032	.019	.016	.010	.006	
6.0	.134	.081	.043	.115	.070	.037	.079	.049	.026	.046	.029	.016	.015	.009	.005	
7.0	.127	.074	.036	.110	.064	.031	.076	.045	.022	.044	.026	.013	.014	.009	.004	
8.0	.121	.068	.031	.105	.059	.027	.072	.041	.019	.042	.024	.011	.014	.008	.004	
9.0	.116	.063	.027	.100	.055	.024	.069	.038	.017	.040	.023	.010	.013	.007	.003	
10.0	.111	.059	.024	.095	.051	.021	.066	.036	.015	.039	.021	.009	.013	.007	.003	

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 2.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:梁玉莲  
Test Date:2024-01-22

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:12.400m [K=1.0000]  
Remarks:

UGR(Unified Glare Rating) Table

Test:U:240.34V I:0.2639A P:61.294W PF:0.9664 Freq:50.00Hz Lamp Flux:6639.55x1 lm		
NAME: 595X1195 3CCT背发光灯盘	TYPE: LED	WEIGHT:
SPEC.: 240V60W4000K	DIM.:	SERIAL No.: 01
MFR.:	SUR.: 555X1155MM	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	15.0	16.3	15.2	16.5	16.7	16.3	17.6	16.5	17.8	18.0
3H	15.8	17.0	16.1	17.3	17.5	17.0	18.3	17.3	18.5	18.7
4H	16.2	17.4	16.5	17.6	17.9	17.3	18.5	17.6	18.7	18.9
6H	16.6	17.7	16.9	18.0	18.2	17.4	18.5	17.8	18.8	19.1
8H	16.7	17.7	17.0	18.0	18.3	17.4	18.5	17.8	18.8	19.0
12H	16.7	17.7	17.1	18.0	18.3	17.4	18.4	17.7	18.7	19.0
4H 2H	15.4	16.5	15.7	16.8	17.0	16.5	17.7	16.8	17.9	18.1
3H	16.3	17.3	16.6	17.6	17.9	17.6	18.6	18.0	18.9	19.2
4H	16.8	17.7	17.2	18.0	18.3	18.2	19.1	18.5	19.4	19.7
6H	17.3	18.1	17.6	18.4	18.8	18.6	19.4	18.9	19.7	20.1
8H	17.4	18.1	17.8	18.5	18.9	18.6	19.4	19.0	19.7	20.1
12H	17.5	18.2	17.9	18.5	18.9	18.6	19.3	19.0	19.6	20.0
8H 4H	17.1	17.8	17.5	18.2	18.6	18.3	19.1	18.8	19.5	19.8
6H	17.6	18.2	18.0	18.6	19.0	19.0	19.6	19.4	20.0	20.4
8H	17.8	18.3	18.2	18.7	19.2	19.1	19.7	19.6	20.1	20.6
12H	18.0	18.4	18.4	18.9	19.3	19.1	19.6	19.6	20.0	20.5
12H 4H	17.1	17.8	17.6	18.2	18.6	18.3	19.0	18.7	19.4	19.8
6H	17.7	18.3	18.2	18.7	19.1	19.0	19.6	19.5	20.0	20.4
8H	17.9	18.4	18.4	18.9	19.3	19.2	19.7	19.7	20.1	20.6
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.6 / - 0.7					+ 0.2 / - 0.3				
1.5H	+ 0.5 / - 0.7					+ 0.2 / - 0.3				
2.0H	+ 1.0 / - 0.6					+ 0.9 / - 1.6				

CIE Pub.117, 6640 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 6.6)  
Area: 0.641 m2

H(β) Range:-90 - 90DEG  
H(β) Interval: 2.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:梁玉莲  
Test Date:2024-01-22

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:12.400m [K=1.0000]  
Remarks:

UTILIZATION FACTORS TABLE

Test:U:240.34V I:0.2639A P:61.294W PF:0.9664 Freq:50.00Hz Lamp Flux:6639.55x1 lm		
NAME: 595X1195 3CCT背发光灯盘	TYPE: LED	WEIGHT:
SPEC.: 240V60W4000K	DIM.:	SERIAL No.: 01
MFR.:	SUR.: 555X1155MM	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) k(RI) x RCR = 5									
k = 0.60	67	57	52	67	57	51	66	57	51	46
0.80	77	67	61	76	67	61	74	66	61	55
1.00	84	75	69	83	75	69	81	76	69	63
1.25	91	82	76	89	81	76	87	80	75	69
1.50	95	87	81	93	86	81	91	84	80	73
2.00	100	94	88	99	92	88	95	90	86	79
2.50	103	97	92	101	96	91	98	93	89	82
3.00	106	101	96	104	99	95	100	96	93	85
4.00	109	105	101	107	103	100	103	100	97	89
5.00	111	107	104	109	105	102	104	102	99	91
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

H(β) Range:-90 - 90DEG  
 H(β) Interval: 2.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:梁玉莲  
 Test Date:2024-01-22

V(B) Range:-80 - 80DEG  
 V(B) Interval: 5.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.00.453  
 Humidity:65.0%  
 Test Distance:12.400m [K=1.0000]  
 Remarks:

ISOCANDELA DIAGRAM

Test:U:240.34V I:0.2639A P:61.294W PF:0.9664 Freq:50.00Hz Lamp Flux:6639.55x1 lm		
NAME: 595X1195 3CCT背发光灯盘	TYPE: LED	WEIGHT:
SPEC.: 240V60W4000K	DIM.:	SERIAL No.: 01
MFR.:	SUR.: 555X1155MM	Shielding Angle:

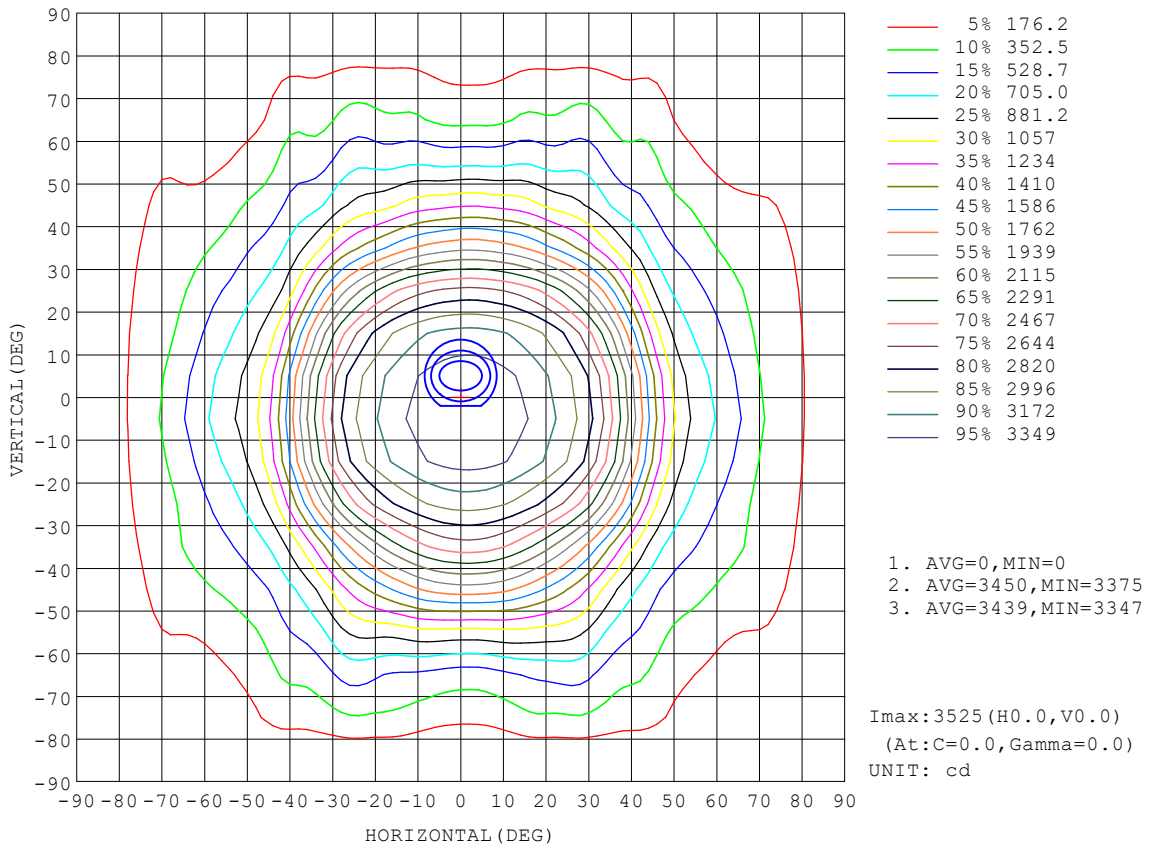


H(β) Range:-90 - 90DEG  
H(β) Interval: 2.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:梁玉莲  
Test Date:2024-01-22

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:12.400m [K=1.0000]  
Remarks:



**AAI Figure**

Test:U:240.34V I:0.2639A P:61.294W PF:0.9664 Freq:50.00Hz Lamp Flux:6639.55x1 lm		
NAME: 595X1195 3CCT背发光灯盘	TYPE: LED	WEIGHT:
SPEC.: 240V60W4000K	DIM.:	SERIAL No.: 01
MFR.:	SUR.: 555X1155MM	Shielding Angle:

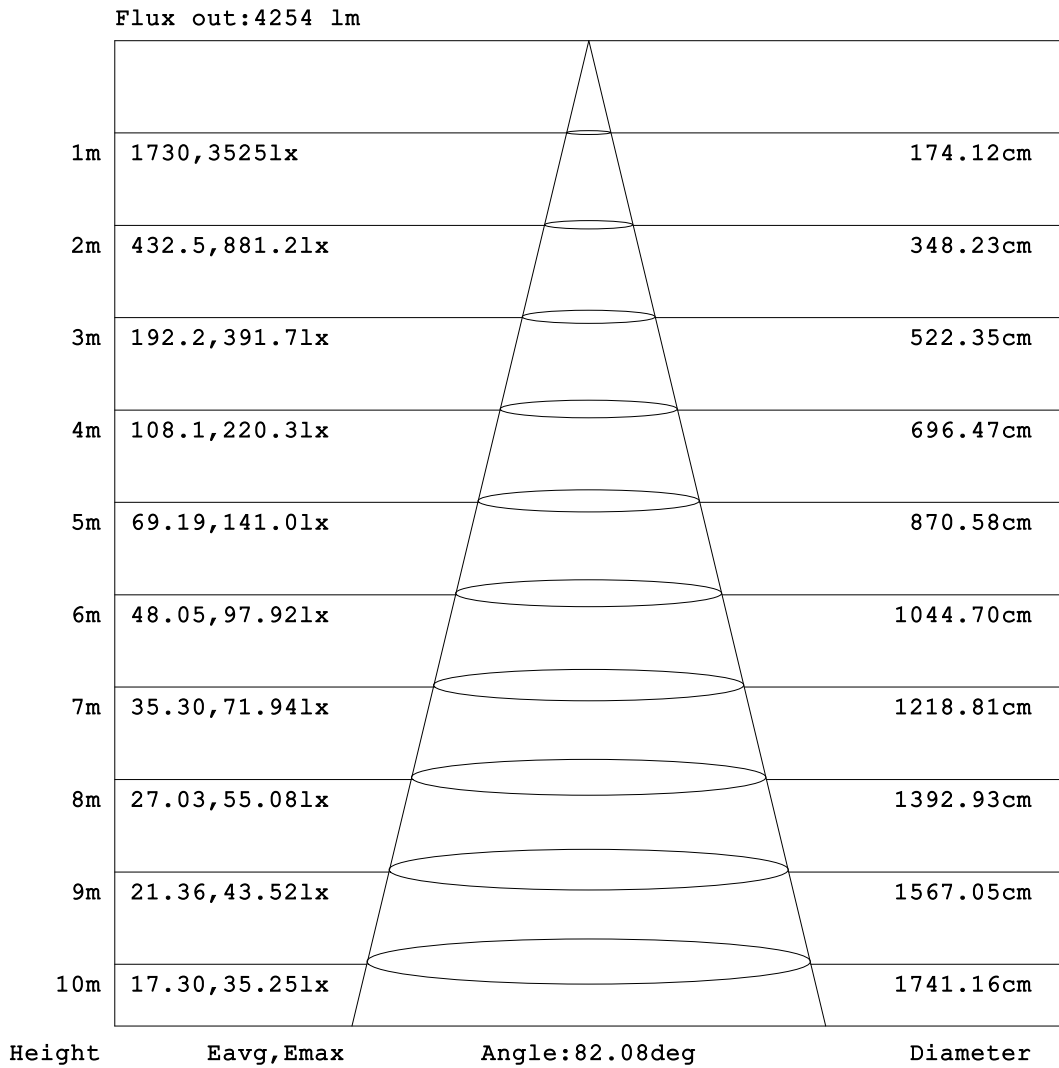


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG  
 H(β) Interval: 2.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:梁玉莲  
 Test Date:2024-01-22

V(B) Range:-80 - 80DEG  
 V(B) Interval: 5.0DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.00.453  
 Humidity:65.0%  
 Test Distance:12.400m [K=1.0000]  
 Remarks:

ISOLUX DIAGRAM

Test:U:240.34V I:0.2639A P:61.294W PF:0.9664 Freq:50.00Hz Lamp Flux:6639.55x1 lm		
NAME: 595X1195 3CCT背发光灯盘	TYPE: LED	WEIGHT:
SPEC.: 240V60W4000K	DIM.:	SERIAL No.: 01
MFR.:	SUR.: 555X1155MM	Shielding Angle:

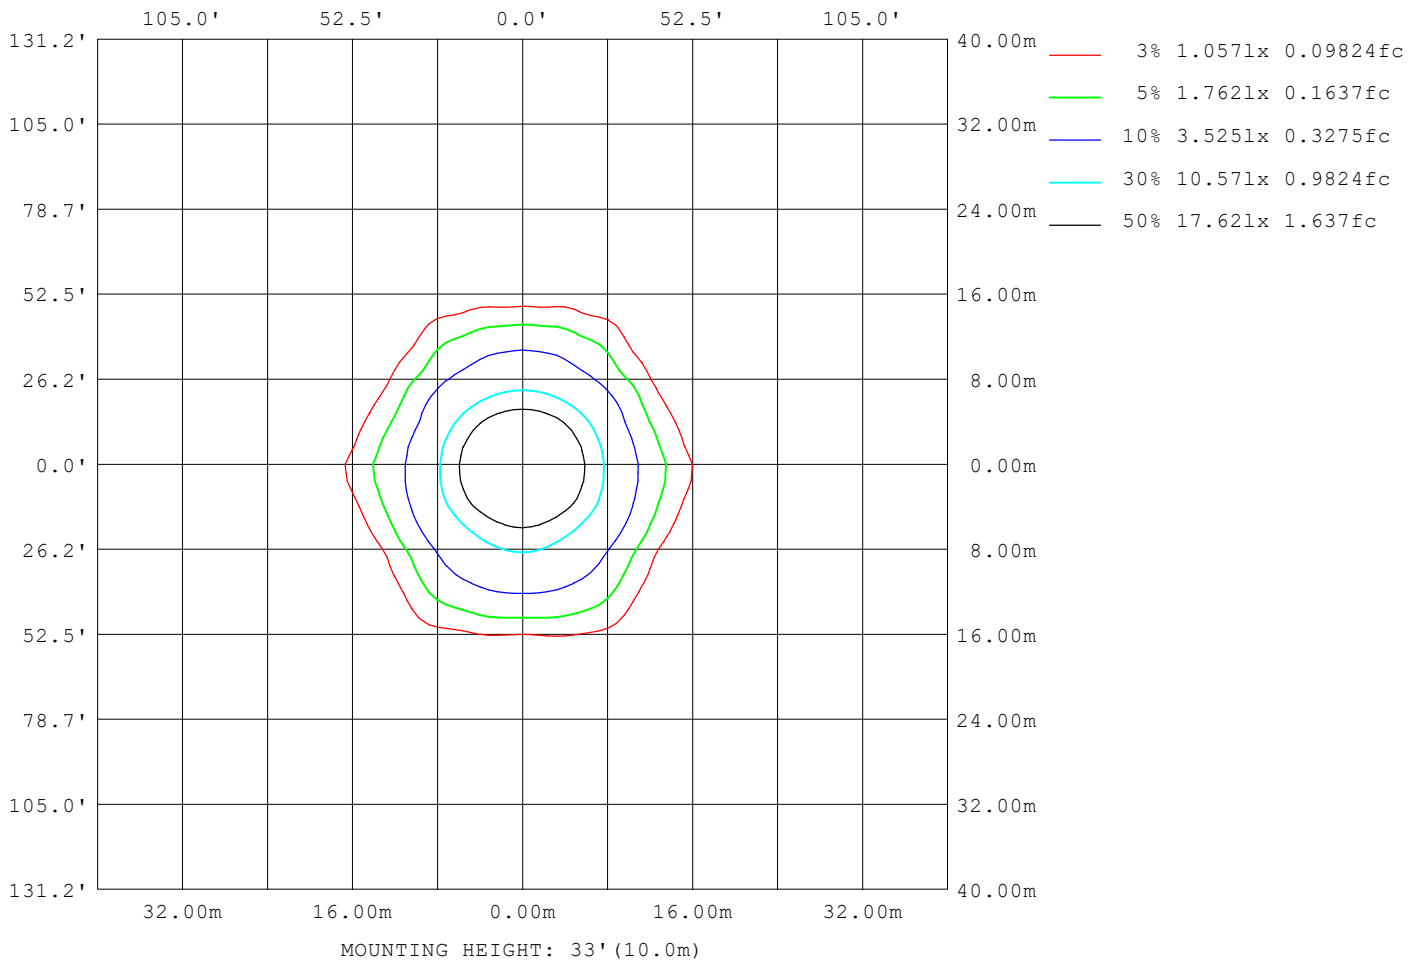

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 2.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:梁玉莲  
Test Date:2024-01-22

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:12.400m [K=1.0000]  
Remarks:

## LED Avg.L Report

Test:U:240.34V I:0.2639A P:61.294W PF:0.9664 Freq:50.00Hz Lamp Flux:6639.55x1 lm		
NAME: 595X1195 3CCT背发光灯盘	TYPE: LED	WEIGHT:
SPEC.: 240V60W4000K	DIM.:	SERIAL No.: 01
MFR.:	SUR.: 555X1155MM	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	1992
L_0~180 (75) av	1693
L_0~180 (85) av	1264
L_90~270 (65) av	1353
L_90~270 (75) av	1070
L_90~270 (85) av	0
L_45 (65) av	1693
L_45 (75) av	1593
L_45 (85) av	1003

Standard: GB/T 29293-2012

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 2.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:梁玉莲  
Test Date:2024-01-22

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:12.400m [K=1.0000]  
Remarks:

Planar Illuminance Curve

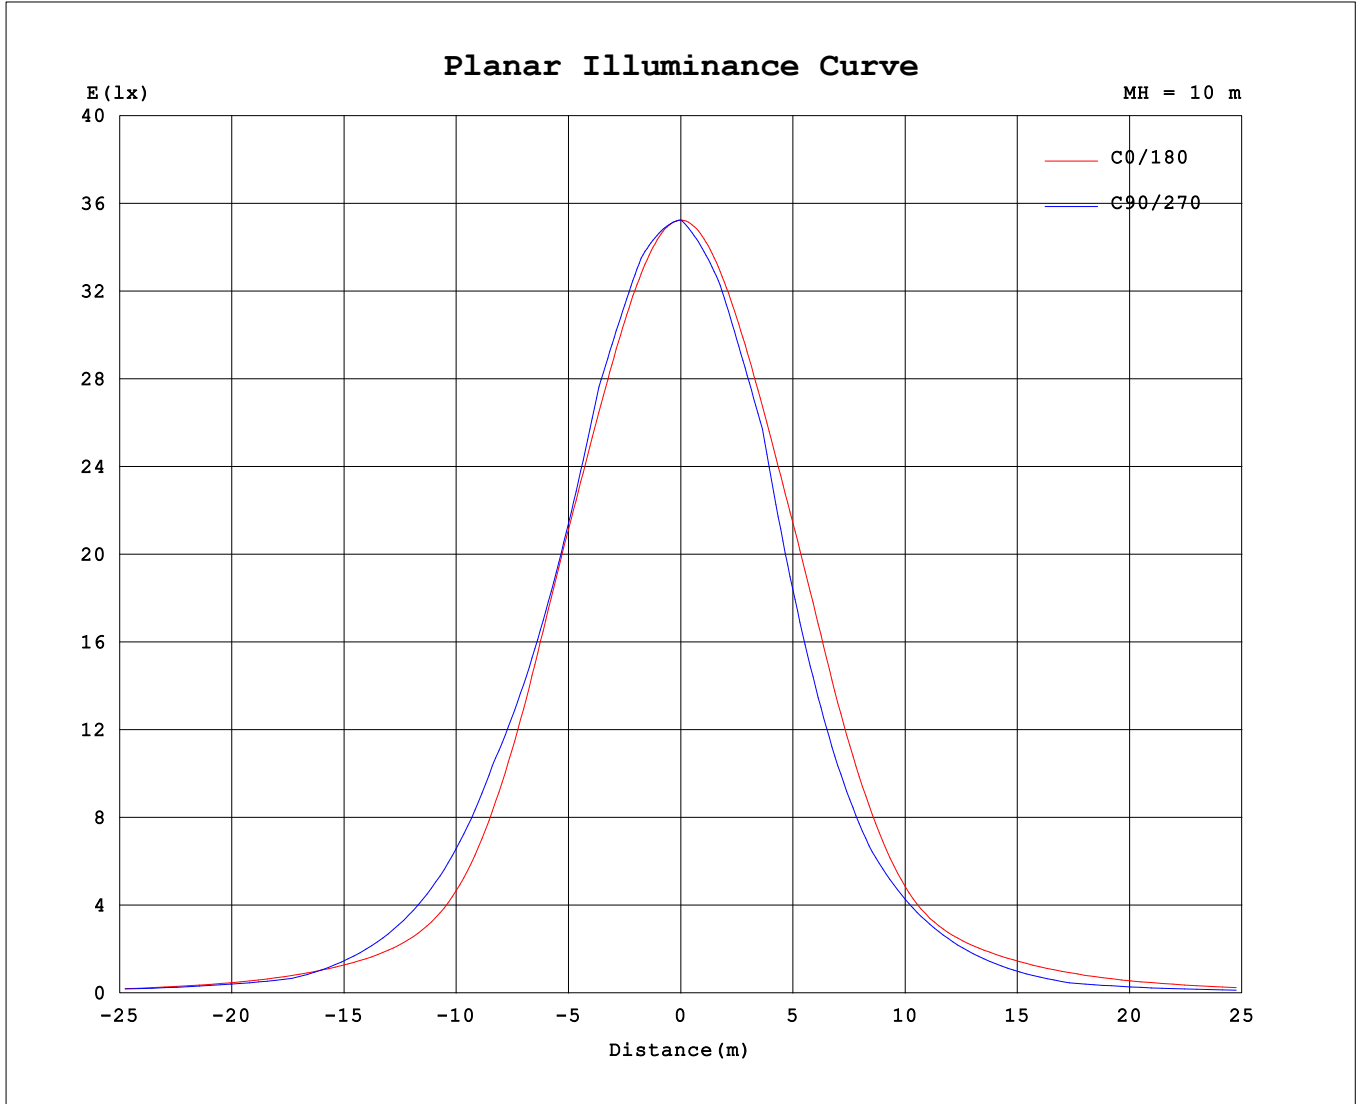

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 2.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:梁玉莲  
Test Date:2024-01-22

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:12.400m [K=1.0000]  
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Table with 3 columns: NAME, TYPE, WEIGHT, SPEC., DIM., SERIAL No., MFR., SUR., Shielding Angle. Contains test parameters like U:240.34V, I:0.2639A, P:61.294W, PF:0.9664, Freq:50.00Hz, Lamp Flux:6639.55x1 lm.

Table--1

UNIT: cd

Large data table with 20 columns (0-90 degrees) and 20 rows (0-90 degrees). Values represent luminous intensity in cd, showing a peak at 0 degrees and decreasing towards 90 degrees.

H(β) Range:-90 - 90DEG
H(β) Interval: 2.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:梁玉莲
Test Date:2024-01-22

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:12.400m [K=1.0000]
Remarks:





LUMINOUS DISTRIBUTION INTENSITY DATA

Table with 3 columns: NAME, TYPE, WEIGHT, SPEC., DIM., SERIAL No., MFR., SUR., Shielding Angle. Includes test parameters like U:240.34V, I:0.2639A, P:61.294W, PF:0.9664, Freq:50.00Hz, Lamp Flux:6639.55x1 lm.

Table--4

UNIT: cd

Large data table with columns for C (DEG) and y (DEG) from 0 to 90, and intensity values in cd. Values decrease as the angle increases.

H(β) Range:-90 - 90DEG
H(β) Interval: 2.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:梁玉莲
Test Date:2024-01-22

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:12.400m [K=1.0000]
Remarks: