
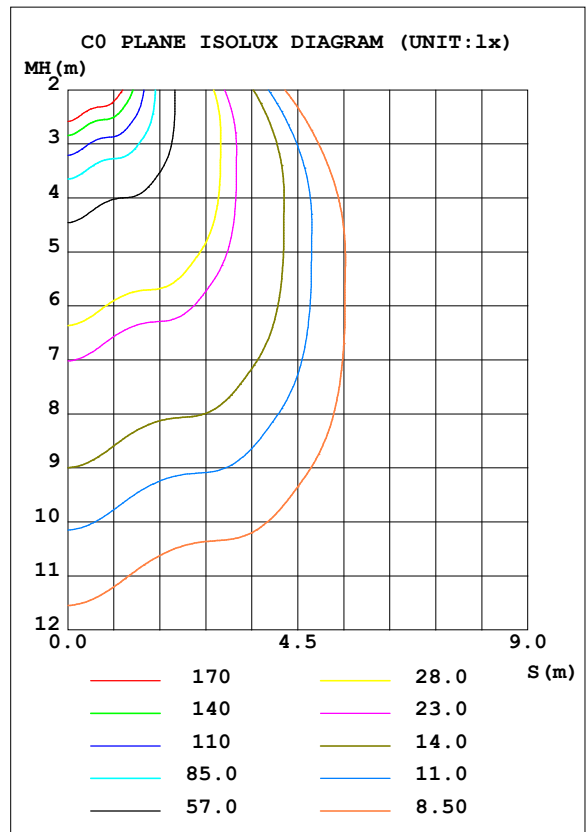


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:240.28V I:0.1004A P:23.043W PF:0.9556 Freq:49.99Hz Lamp Flux:3291.06x1 lm		
NAME: S29692	TYPE:LED NCF	WEIGHT:
SPEC.:23W 4000K	DIM.: 1500x96x79mm	SERIAL No.:
MFR.:	SUR.:1500x96mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 142.82 lm/W			
MODEL	S29692	I _{max} (cd)	1134	S/MH (C0/180)	1.24
NOMINAL POWER (W)	23.0433	LOR (%)	100.0	S/MH (C90/270)	1.23
RATED VOLTAGE (V)	240	TOTAL FLUX (lm)	3291.1	η UP, DN (C0-180)	1.4, 48.4
NOMINAL FLUX (lm)	3291.06	CIE CLASS	DIRECT	η UP, DN (C180-360)	1.5, 48.7
LAMPS INSIDE	1	η up (%)	2.9	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	240.282	η down (%)	97.1	CIBSE SHR MAX	1.35

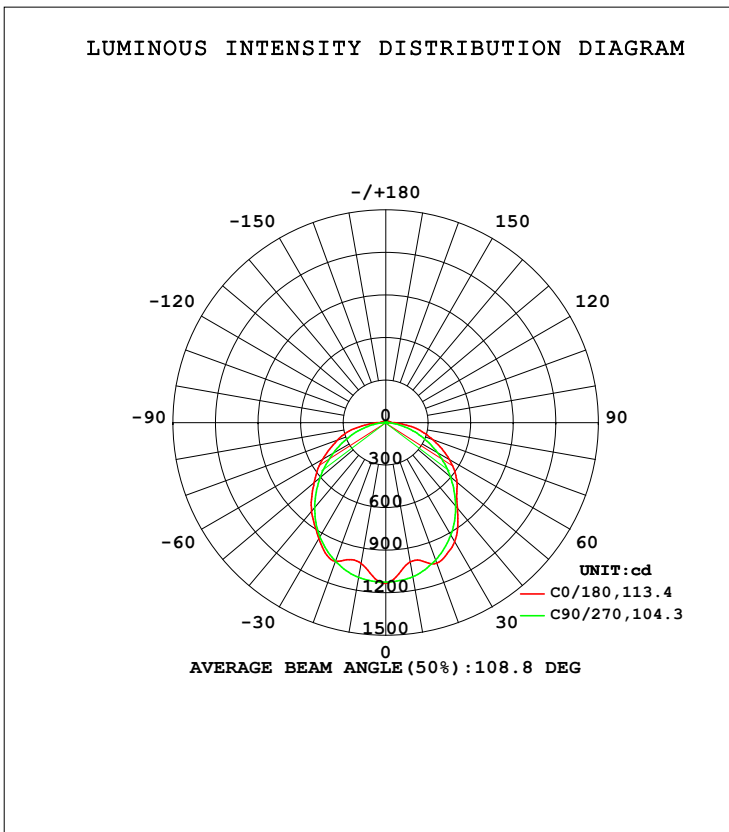

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2024-04-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.421
 Humidity: 65.0%
 Test Distance: 11.498m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	☉ zone	☉ total	lum, lamp
10	998.3	1028	1104	1010	1009	1015	1108	1031	0- 10	102.5	102.5	3.12,3.12
20	1055	961.4	1031	968.0	1040	956.3	1040	955.0	10- 20	286.1	388.7	11.8,11.8
30	971.1	950.9	916.2	933.0	944.2	933.4	930.2	944.2	20- 30	452.5	841.2	25.6,25.6
40	787.7	819.4	767.6	783.0	814.7	790.0	779.9	817.1	30- 40	545.3	1387	42.1,42.1
50	656.0	620.3	595.8	624.9	659.7	628.3	606.0	619.5	40- 50	547.8	1934	58.8,58.8
60	516.9	467.3	419.9	468.7	514.3	478.3	425.8	473.1	50- 60	490.3	2425	73.7,73.7
70	353.3	334.3	250.8	329.1	363.3	334.6	256.3	338.9	60- 70	390.9	2815	85.5,85.5
80	202.0	195.8	98.33	197.2	208.8	201.0	102.0	200.3	70- 80	261.6	3077	93.5,93.5
90	58.88	75.77	13.06	68.46	60.00	75.99	12.42	81.49	80- 90	118.1	3195	97.1,97.1
100	26.96	28.76	8.866	27.88	26.98	29.34	9.446	30.98	90-100	38.60	3234	98.3,98.3
110	21.60	17.44	4.653	18.12	21.36	18.02	4.593	19.13	100-110	20.39	3254	98.9,98.9
120	15.82	9.952	4.901	11.23	15.29	11.44	4.495	11.64	110-120	12.91	3267	99.3,99.3
130	11.36	6.954	5.370	7.437	10.58	7.455	5.004	7.664	120-130	8.049	3275	99.5,99.5
140	8.422	6.488	6.144	6.937	7.453	6.554	5.771	6.571	130-140	5.528	3281	99.7,99.7
150	7.497	6.905	6.812	7.121	6.921	6.729	6.530	6.587	140-150	4.281	3285	99.8,99.8
160	7.596	7.346	7.313	7.430	7.338	7.212	7.188	7.070	150-160	3.278	3288	99.9,99.9
170	8.003	7.772	7.746	7.746	7.980	7.637	7.664	7.512	160-170	2.131	3290	100,100
180	8.121	8.021	7.871	7.880	8.155	7.963	7.938	7.821	170-180	0.7504	3291	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2024-04-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:11.498m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:240.28V I:0.1004A P:23.043W PF:0.9556 Freq:49.99Hz Lamp Flux:3291.06x1 lm		
NAME: S29692	TYPE:LED NCF	WEIGHT:
SPEC.:23W 4000K	DIM.: 1500x96x79mm	SERIAL No.:
MFR.:	SUR.:1500x96mm	Shielding Angle:

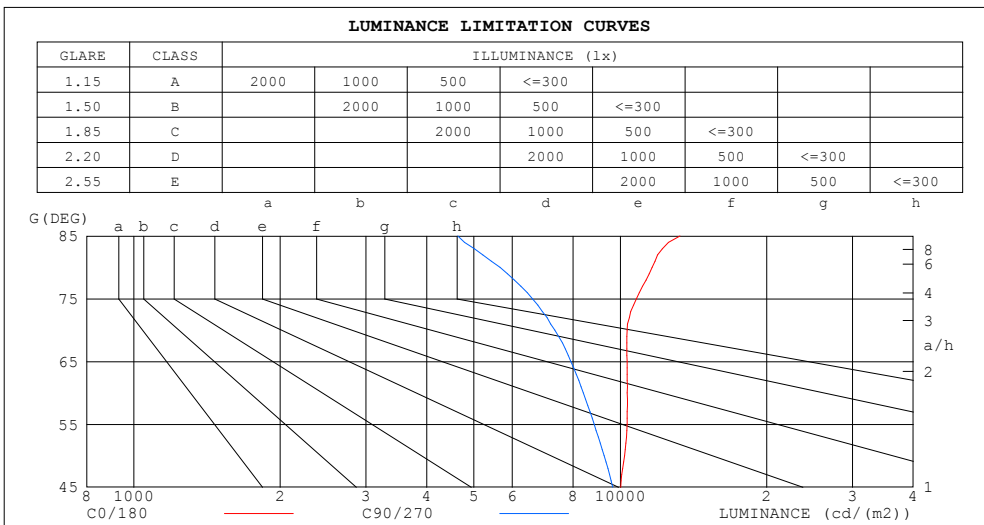

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	13269	4638
80	11634	5663
75	10792	6594
70	10329	7332
65	10324	7917
60	10338	8398
55	10329	8835
50	10206	9269
45	10015	9651


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-04-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:11.498m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.28V I:0.1004A P:23.043W PF:0.9556 Freq:49.99Hz Lamp Flux:3291.06x1 lm		
NAME: S29692	TYPE:LED NCF	WEIGHT:
SPEC.:23W 4000K	DIM.: 1500x96x79mm	SERIAL No.:
MFR.:	SUR.:1500x96mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pw																0
pfc																0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.09	1.09	1.09	1.04	1.04	1.04	.99	.99	.99	.97
1.0	1.02	.97	.93	.99	.95	.91	.95	.91	.88	.90	.87	.85	.86	.84	.82	.79
2.0	.89	.81	.75	.86	.80	.74	.82	.77	.72	.79	.74	.70	.75	.71	.68	.66
3.0	.78	.69	.62	.76	.68	.62	.72	.66	.60	.69	.63	.59	.66	.61	.57	.55
4.0	.69	.60	.53	.67	.59	.52	.64	.57	.51	.61	.55	.50	.59	.54	.49	.47
5.0	.61	.52	.45	.60	.51	.45	.57	.50	.44	.55	.49	.43	.53	.47	.43	.40
6.0	.55	.46	.39	.54	.45	.39	.52	.44	.39	.50	.43	.38	.48	.42	.37	.35
7.0	.50	.41	.35	.49	.41	.35	.47	.40	.34	.45	.39	.34	.44	.38	.33	.31
8.0	.46	.37	.31	.45	.37	.31	.43	.36	.30	.42	.35	.30	.40	.34	.30	.28
9.0	.42	.33	.28	.41	.33	.28	.40	.32	.27	.38	.32	.27	.37	.31	.27	.25
10.0	.39	.31	.25	.38	.30	.25	.37	.30	.25	.36	.29	.25	.34	.29	.24	.23

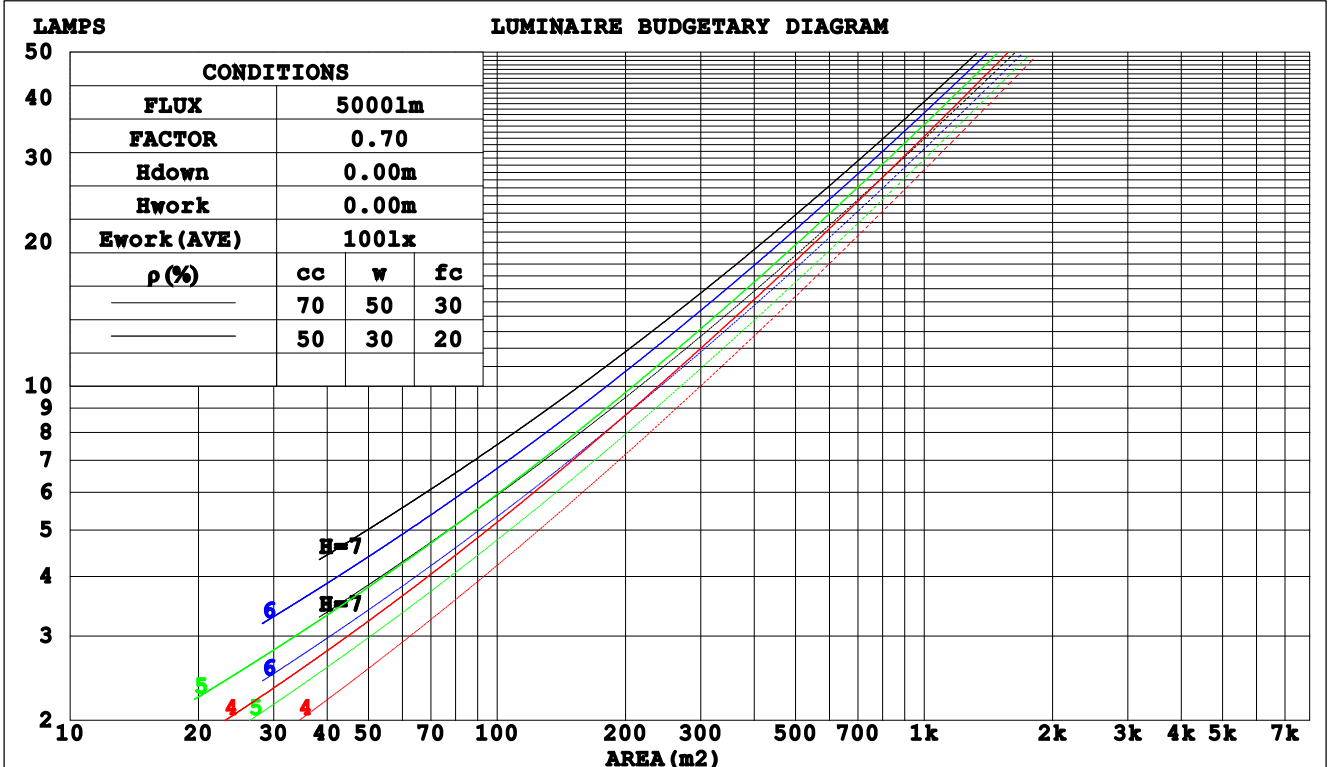

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2024-04-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:11.498m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:240.28V I:0.1004A P:23.043W PF:0.9556 Freq:49.99Hz Lamp Flux:3291.06x1 lm		
NAME: S29692	TYPE:LED NCF	WEIGHT:
SPEC.:23W 4000K	DIM.: 1500x96x79mm	SERIAL No.:
MFR.:	SUR.:1500x96mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.332	.189	.060	.324	.185	.059	.309	.177	.057	.295	.170	.055	.282	.163	.053	
2.0	.303	.166	.051	.296	.163	.050	.283	.157	.049	.271	.152	.048	.259	.147	.046	
3.0	.277	.147	.044	.271	.145	.044	.259	.140	.043	.248	.136	.042	.238	.132	.041	
4.0	.254	.132	.039	.248	.130	.038	.238	.126	.038	.228	.122	.037	.219	.119	.036	
5.0	.233	.119	.034	.228	.117	.034	.219	.114	.034	.210	.111	.033	.202	.108	.032	
6.0	.216	.108	.031	.211	.107	.031	.203	.104	.030	.195	.101	.030	.188	.099	.029	
7.0	.200	.099	.028	.196	.098	.028	.189	.095	.027	.182	.093	.027	.175	.091	.027	
8.0	.187	.091	.026	.183	.090	.025	.176	.088	.025	.170	.086	.025	.164	.084	.024	
9.0	.175	.085	.024	.172	.084	.023	.165	.082	.023	.160	.080	.023	.154	.078	.023	
10.0	.164	.079	.022	.161	.078	.022	.156	.076	.021	.150	.075	.021	.145	.073	.021	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.213	.213	.213	.182	.182	.182	.124	.124	.124	.071	.071	.071	.023	.023	.023	
1.0	.204	.178	.155	.175	.153	.133	.120	.105	.092	.069	.061	.054	.022	.020	.017	
2.0	.196	.154	.119	.168	.133	.103	.115	.092	.072	.066	.053	.042	.021	.017	.014	
3.0	.189	.137	.096	.162	.118	.083	.111	.082	.058	.064	.048	.034	.021	.016	.011	
4.0	.181	.124	.080	.155	.107	.070	.107	.075	.049	.062	.044	.029	.020	.014	.010	
5.0	.173	.114	.070	.149	.098	.061	.102	.069	.043	.059	.040	.025	.019	.013	.008	
6.0	.166	.105	.062	.143	.091	.054	.098	.064	.038	.057	.038	.023	.018	.012	.007	
7.0	.159	.098	.056	.137	.085	.049	.094	.060	.035	.055	.035	.021	.018	.012	.007	
8.0	.152	.093	.052	.131	.080	.045	.091	.056	.032	.053	.033	.019	.017	.011	.006	
9.0	.146	.088	.048	.126	.076	.042	.087	.054	.030	.051	.032	.018	.016	.010	.006	
10.0	.141	.083	.045	.121	.072	.040	.084	.051	.028	.049	.030	.017	.016	.010	.006	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2024-04-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:11.498m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:240.28V I:0.1004A P:23.043W PF:0.9556 Freq:49.99Hz Lamp Flux:3291.06x1 lm										
NAME: S29692					TYPE:LED NCF			WEIGHT:		
SPEC.:23W 4000K					DIM.: 1500x96x79mm			SERIAL No.:		
MFR.:					SUR.:1500x96mm			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	20.7	22.2	21.1	22.5	22.8	20.1	21.6	20.4	21.8	22.1
3H	22.6	24.0	22.9	24.2	24.5	21.5	22.9	21.9	23.2	23.5
4H	23.4	24.8	23.8	25.1	25.4	22.1	23.4	22.4	23.7	24.0
6H	24.2	25.5	24.6	25.8	26.2	22.5	23.7	22.8	24.0	24.4
8H	24.6	25.8	25.0	26.1	26.5	22.6	23.8	23.0	24.1	24.5
12H	24.9	26.0	25.3	26.4	26.7	22.6	23.8	23.0	24.1	24.5
4H 2H	21.3	22.6	21.7	23.0	23.3	20.8	22.1	21.2	22.5	22.8
3H	23.4	24.5	23.8	24.9	25.3	22.5	23.7	22.9	24.0	24.4
4H	24.4	25.5	24.8	25.8	26.2	23.2	24.3	23.7	24.7	25.1
6H	25.4	26.3	25.8	26.7	27.2	23.8	24.7	24.2	25.1	25.6
8H	25.8	26.7	26.3	27.1	27.6	24.0	24.8	24.4	25.3	25.7
12H	26.2	27.0	26.7	27.4	27.9	24.1	24.9	24.5	25.3	25.8
8H 4H	24.8	25.6	25.2	26.1	26.5	23.8	24.6	24.2	25.1	25.5
6H	26.0	26.7	26.4	27.2	27.6	24.6	25.3	25.0	25.8	26.2
8H	26.5	27.2	27.0	27.7	28.2	24.9	25.5	25.4	26.0	26.5
12H	27.1	27.6	27.6	28.1	28.7	25.1	25.7	25.6	26.2	26.7
12H 4H	24.8	25.6	25.3	26.0	26.5	23.8	24.7	24.3	25.1	25.6
6H	26.1	26.7	26.6	27.2	27.7	24.8	25.4	25.3	25.9	26.4
8H	26.7	27.3	27.2	27.8	28.3	25.2	25.8	25.7	26.3	26.8
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.1					+ 0.2 / - 0.2				
1.5H	+ 0.1 / - 0.2					+ 0.2 / - 0.3				
2.0H	+ 0.1 / - 0.3					+ 0.1 / - 0.3				

CIE Pub.117, 3291 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 4.1)
 Area: 0.1 m2

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2024-04-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:11.498m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:240.28V I:0.1004A P:23.043W PF:0.9556 Freq:49.99Hz Lamp Flux:3291.06x1 lm		
NAME: S29692	TYPE:LED NCF	WEIGHT:
SPEC.:23W 4000K	DIM.: 1500x96x79mm	SERIAL No.:
MFR.:	SUR.:1500x96mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	56	44	37	55	44	37	54	44	37	31
0.80	66	54	47	65	54	46	63	53	46	39
1.00	74	63	55	73	62	55	70	63	54	47
1.25	81	70	63	79	69	62	76	68	61	53
1.50	86	76	68	84	75	68	81	73	66	58
2.00	93	84	77	91	82	76	87	80	74	66
2.50	97	88	82	95	87	81	90	84	79	70
3.00	100	93	87	98	91	86	93	88	83	74
4.00	104	98	93	102	96	91	97	92	88	79
5.00	107	102	97	104	99	95	99	95	92	82
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2024-04-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:11.498m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:240.28V I:0.1004A P:23.043W PF:0.9556 Freq:49.99Hz Lamp Flux:3291.06x1 lm		
NAME: S29692	TYPE:LED NCF	WEIGHT:
SPEC.:23W 4000K	DIM.: 1500x96x79mm	SERIAL No.:
MFR.:	SUR.:1500x96mm	Shielding Angle:

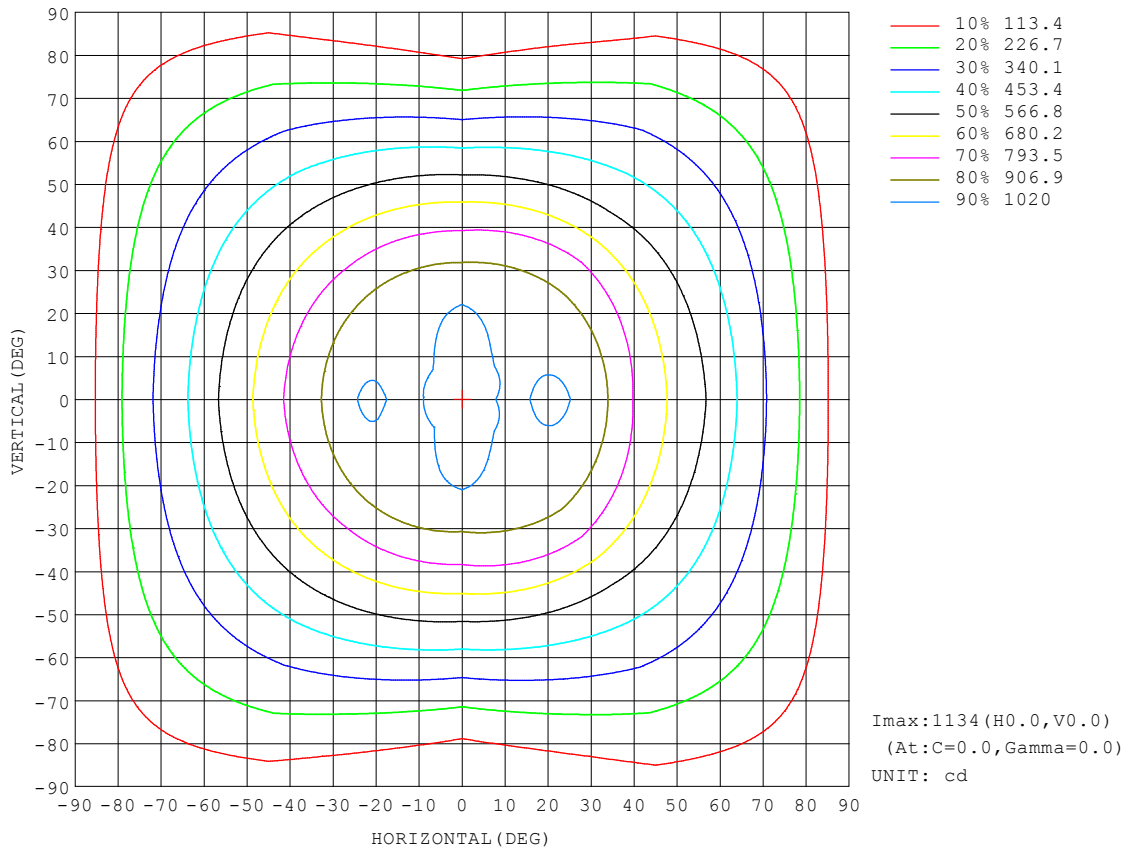


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2024-04-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:11.498m [K=1.0000]
 Remarks:

AAI Figure

Test:U:240.28V I:0.1004A P:23.043W PF:0.9556 Freq:49.99Hz Lamp Flux:3291.06x1 lm		
NAME: S29692	TYPE:LED NCF	WEIGHT:
SPEC.:23W 4000K	DIM.: 1500x96x79mm	SERIAL No.:
MFR.:	SUR.:1500x96mm	Shielding Angle:

Flux out:2038 lm

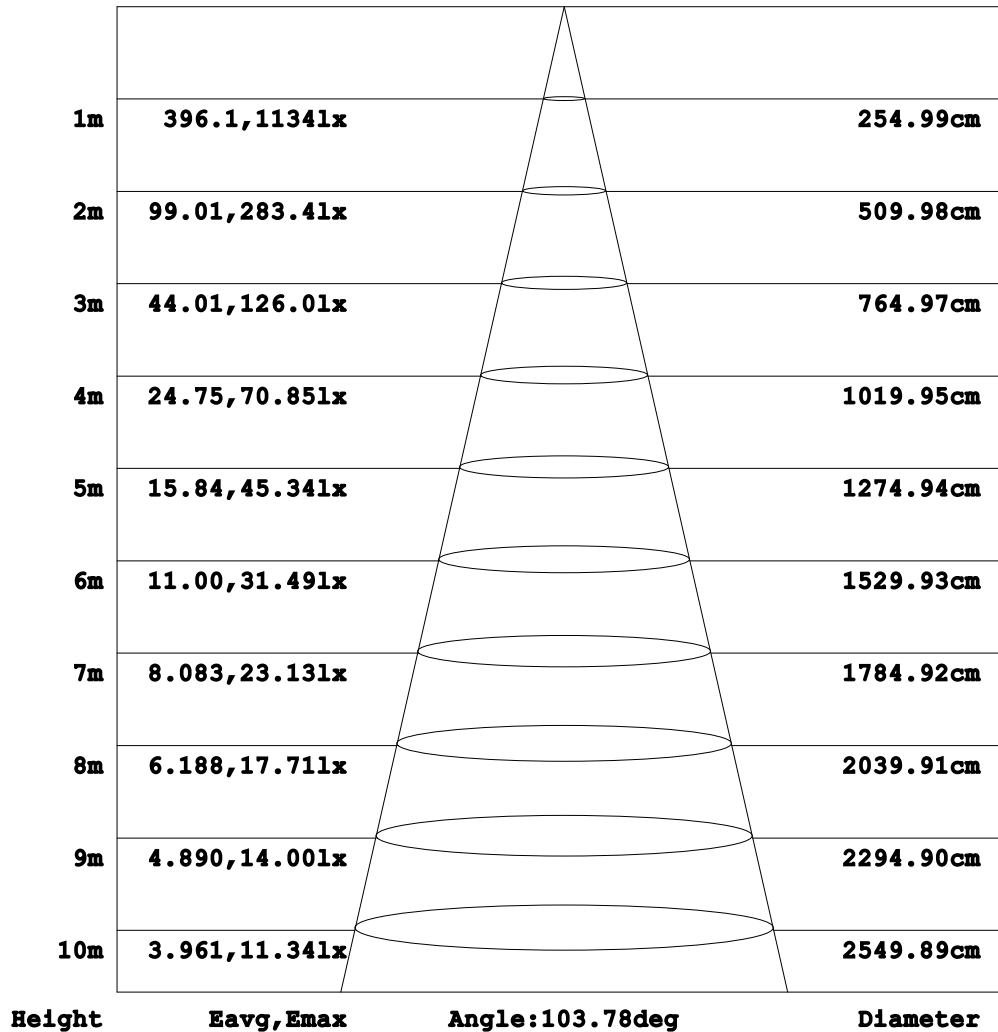


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2024-04-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:11.498m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:240.28V I:0.1004A P:23.043W PF:0.9556 Freq:49.99Hz Lamp Flux:3291.06x1 lm		
NAME: S29692	TYPE:LED NCF	WEIGHT:
SPEC.:23W 4000K	DIM.: 1500x96x79mm	SERIAL No.:
MFR.:	SUR.:1500x96mm	Shielding Angle:

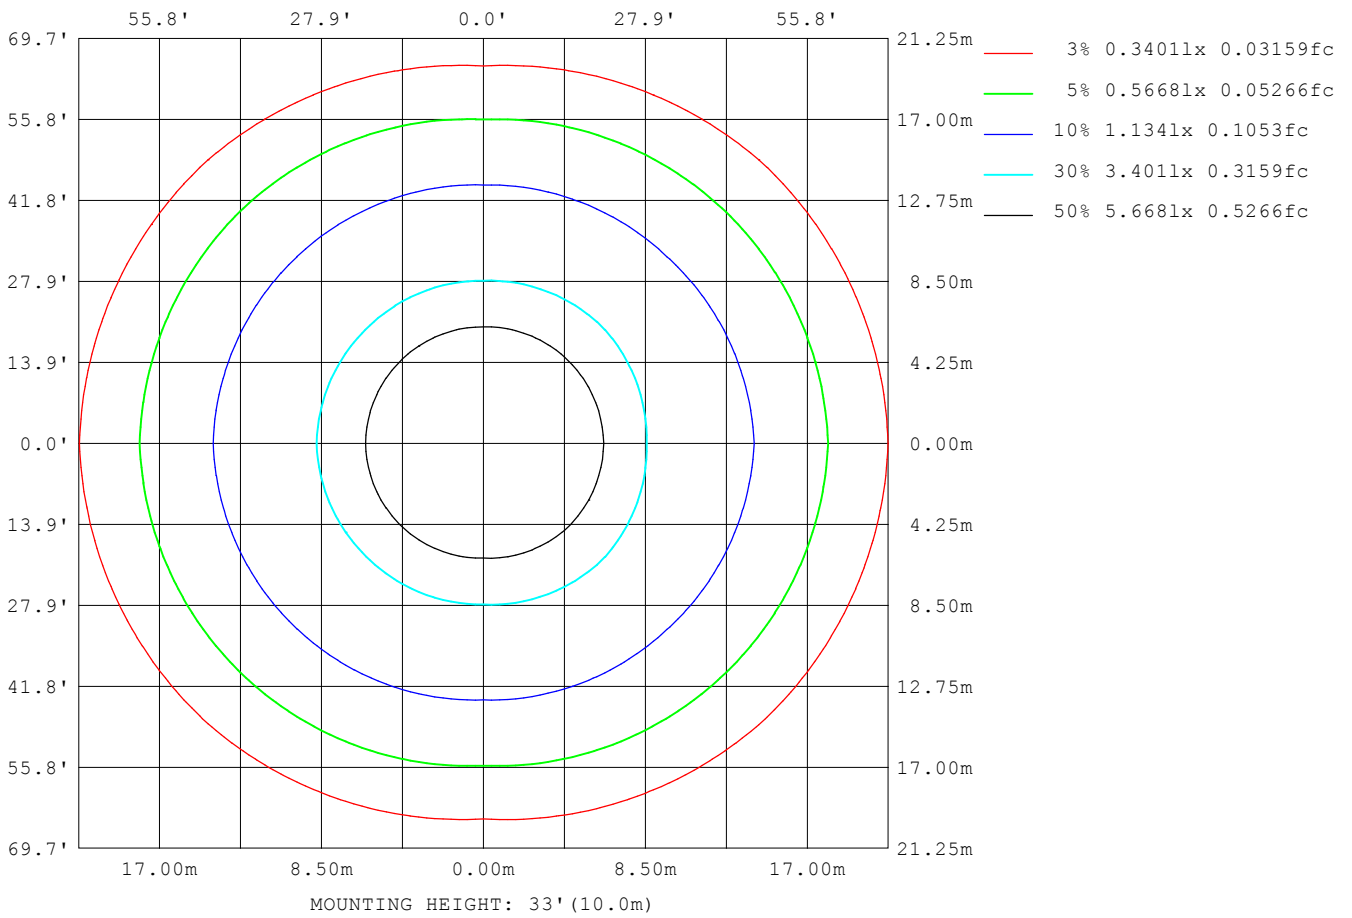

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-04-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:11.498m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:240.28V I:0.1004A P:23.043W PF:0.9556 Freq:49.99Hz Lamp Flux:3291.06x1 lm		
NAME: S29692	TYPE:LED NCF	WEIGHT:
SPEC.:23W 4000K	DIM.: 1500x96x79mm	SERIAL No.:
MFR.:	SUR.:1500x96mm	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	10296
L_0~180 (75) av	11134
L_0~180 (85) av	13370
L_90~270 (65) av	7978
L_90~270 (75) av	6692
L_90~270 (85) av	4749
L_45 (65) av	9531
L_45 (75) av	10233
L_45 (85) av	14845

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2024-04-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:11.498m [K=1.0000]
 Remarks:

Planar Illuminance Curve

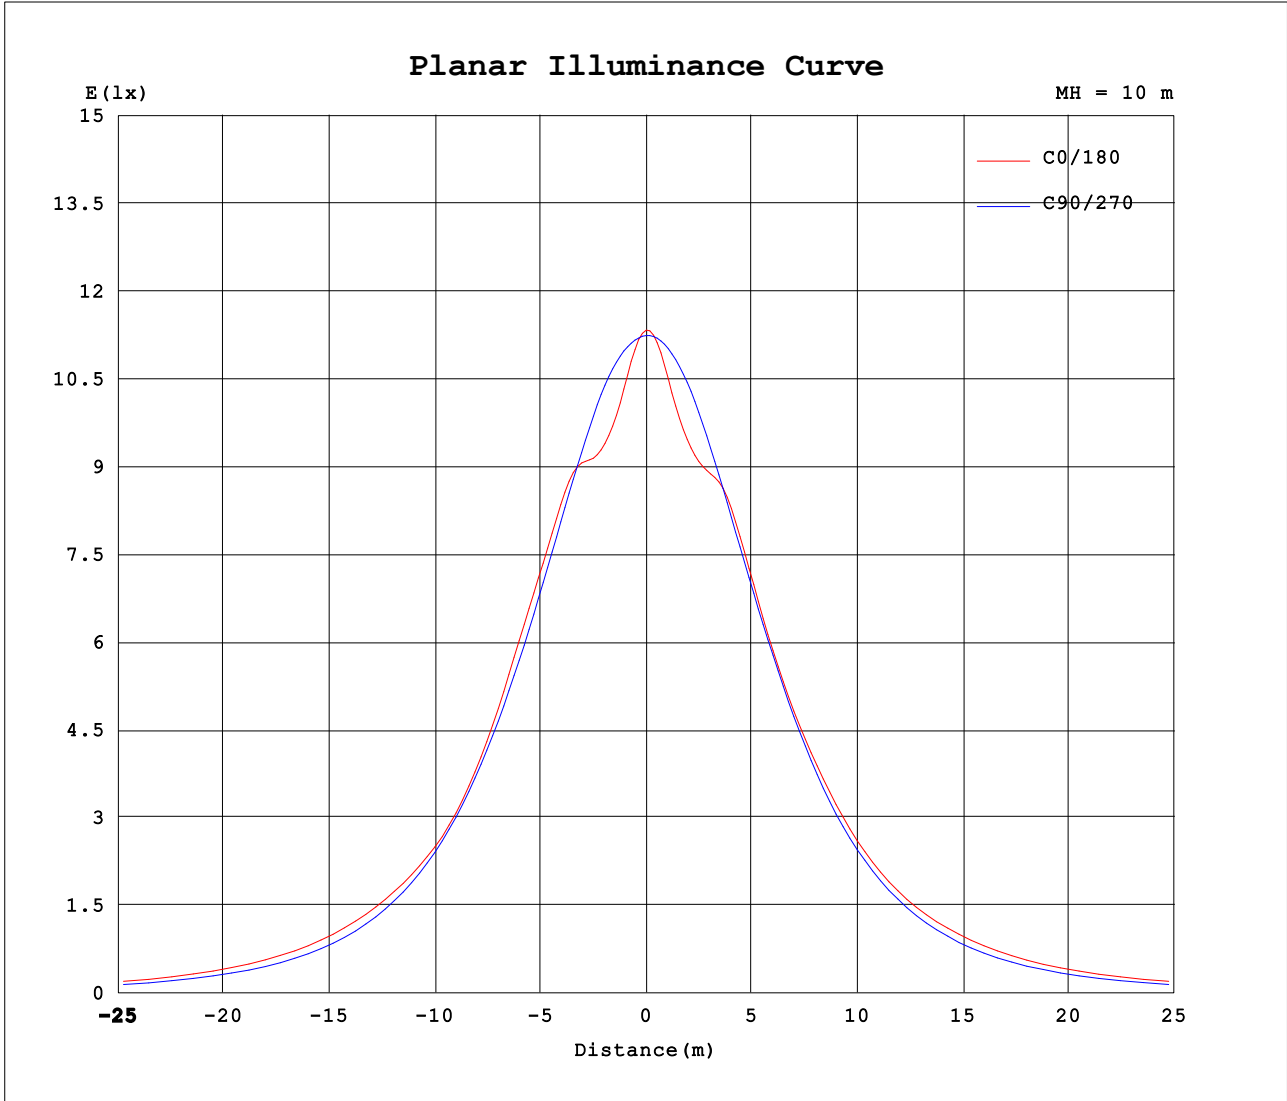

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2024-04-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:11.498m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:240.28V I:0.1004A P:23.043W PF:0.9556 Freq:49.99Hz Lamp Flux:3291.06x1 lm		
NAME: S29692	TYPE:LED NCF	WEIGHT:
SPEC.:23W 4000K	DIM.: 1500x96x79mm	SERIAL No.:
MFR.:	SUR.:1500x96mm	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	45	90	135	180	225	270	315											
0	1134	1118	1124	1120	1134	1118	1124	1120											
5	1069	1096	1118	1078	1086	1082	1122	1101											
10	998	1028	1104	1010	1009	1015	1108	1031											
15	1012	974	1073	972	1000	969	1081	972											
20	1055	961	1031	968	1040	956	1040	955											
25	1022	972	978	973	1013	961	990	964											
30	971	951	916	933	944	933	930	944											
35	886	894	847	860	877	868	860	889											
40	788	819	768	783	815	790	780	817											
45	708	720	682	704	738	709	695	717											
50	656	620	596	625	660	628	606	619											
55	592	539	507	547	591	552	517	541											
60	517	467	420	469	514	478	426	473											
65	436	401	335	399	434	405	340	406											
70	353	334	251	329	363	335	256	339											
75	279	263	171	261	297	266	176	269											
80	202	196	98.3	197	209	201	102	200											
85	116	132	40.4	125	117	134	42.4	126											
90	58.9	75.8	13.1	68.5	60.0	76.0	12.4	81.5											
95	35.4	43.6	10.1	39.9	35.0	43.9	10.7	45.6											
100	27.0	28.8	8.87	27.9	27.0	29.3	9.45	31.0											
105	24.3	21.8	6.50	22.0	24.4	22.4	7.83	23.6											
110	21.6	17.4	4.65	18.1	21.4	18.0	4.59	19.1											
115	18.5	13.3	4.66	14.5	17.9	14.5	4.42	15.3											
120	15.8	9.95	4.90	11.2	15.3	11.4	4.49	11.6											
125	13.5	7.78	5.09	8.69	12.9	8.81	4.70	9.11											
130	11.4	6.95	5.37	7.44	10.6	7.45	5.00	7.66											
135	9.46	6.55	5.72	7.01	8.52	6.81	5.36	7.05											
140	8.42	6.49	6.14	6.94	7.45	6.55	5.77	6.57											
145	7.95	6.69	6.50	7.04	7.05	6.60	6.15	6.48											
150	7.50	6.90	6.81	7.12	6.92	6.73	6.53	6.59											
155	7.48	7.14	7.08	7.26	7.11	6.94	6.87	6.81											
160	7.60	7.35	7.31	7.43	7.34	7.21	7.19	7.07											
165	7.76	7.55	7.60	7.60	7.64	7.46	7.44	7.31											
170	8.00	7.77	7.75	7.75	7.98	7.64	7.66	7.51											
175	8.12	7.94	7.86	7.88	8.14	7.85	7.84	7.72											
180	8.12	8.02	7.87	7.88	8.15	7.96	7.94	7.82											

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2024-04-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:11.498m [K=1.0000]
 Remarks: