

IP20 - MAINTAINED EMERGENCY EXIT BLADE

SKU:S30627

2.5W

35
Lumens
(mains)

25
Lumens
(emergency)

INFORMATION

Modern LED emergency light with test button and high output for wide spacing and reduced costs. Exit blade can be installed using 5 different methods which are all included; Front Mounting, Flag mounted, Ceiling mounted, Ceiling suspended and Recess mounted. Exit blade is pre-installed with an UP directional arrow legend, other legends are available separately.

Warranty: 5 Years


Legends: S30758 = Arrow Right or Left
S30759 = Arrow Down

Mounts Included: Suspended, Recess and Flag



SPECIFICATIONS

	Wattage	2.5W
	Voltage	220-240V (AC)
	Frequency	50/60Hz
	Lumen Output Mains	35lm
	Emergency Lumen Output	25lm
	Viewing Distance	18m
	Test Button	Yes
	Operating Temperature	0-40°C
	Battery Type	LiFePO4 18650 3.2V 1,000mAh
	Charging Time	24hours
	Emergency Duration	3hours
	Colour Temperature	6,500K (Daylight)
	Weight	396g
	IP Rating	IP20
	Safety Class	Class 1

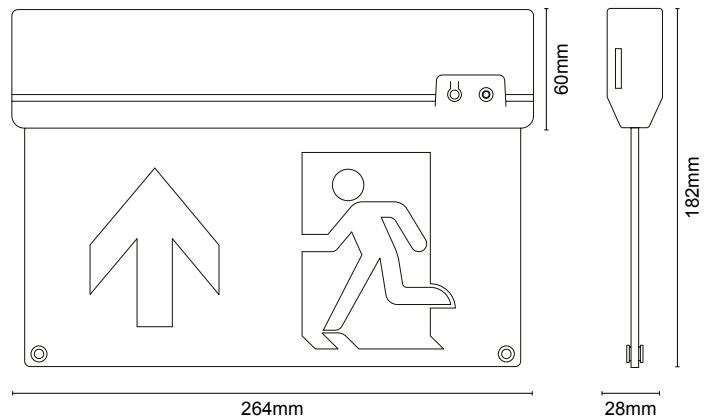

○ Cable entry hole 11mm □ Installation hole size 285 x 50mm

UK CA CE RoHS Compliant

LUMiLiFe is constantly developing and improving its products. For this reason, all product descriptions are intended as a general guide and we may change specifications time to time in the interest of product development, without prior notification or public announcement. Data in this sheet has been obtained in controlled experimental conditions. However, LUMiLiFe cannot accept any liability arising from the reliance on such data to the extent permitted by law.
NOTE: PowerMaster is transitioning to LUMiLiFe, during this time current stock may be delivered as PowerMaster.

